


Kamaro

Essential power.



PISTON AIR COMPRESSORS **MADE IN ITALY**

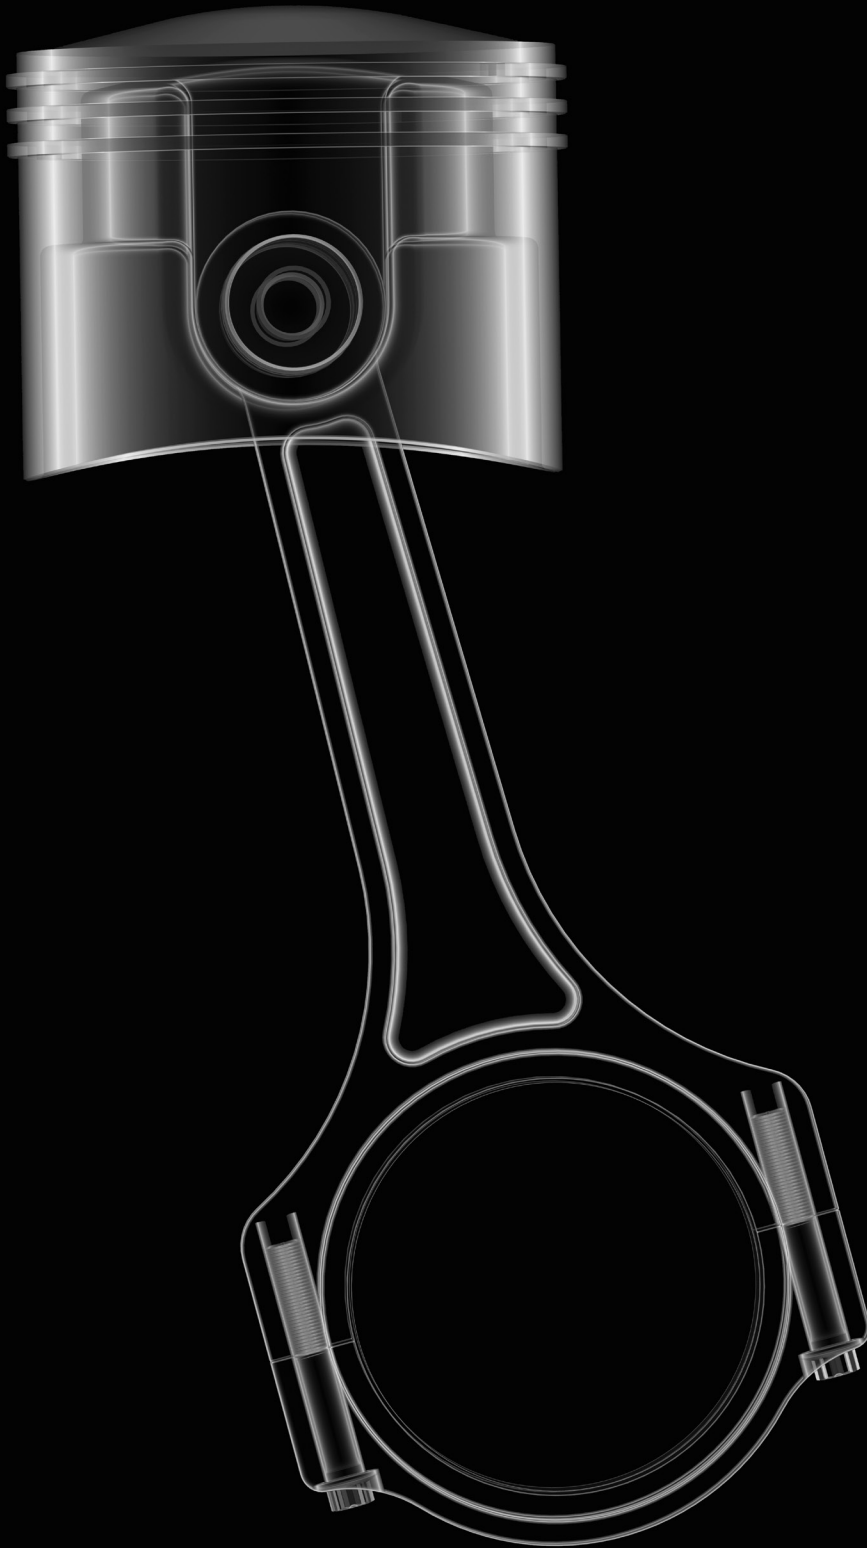

Direct drive HOBBY

KAMARO hobby compressors cover a wide range of DIY applications. These machines are available either in the oil free version, where the absence of oil grants an easy maintenance, or in the lubricated version, where the cast iron cylinder, the oversized motor and the components of high quality grant a longer lifespan. Unfailing for home garage tasks, thanks to the contained size and weight. The easy movement is assured in both versions.



KD15-06



KL20-24

MODEL	LT	HP	KW	V/HZ	RPM	L/MIN	CFM	BAR	PSI	L x D x H (mm)	DB(A)	KG
KD15-2	2	1.5	1.1	230/50	2850	170	6,0	8	116	360 x 270 x 450	71	12
KD15-6	6	1.5	1.1	230/50	2850	170	6,0	8	116	385 x 300 x 500	71	15
KD15-24	24	1.5	1.1	230/50	2850	170	6,0	8	116	600 x 335 x 600	72	20
KD15-50	50	1.5	1.1	230/50	2850	170	6,0	8	116	770 x 360 x 660	72	28
KL19-24	24	2	1.5	230/50	2850	150	5,3	8	116	610 x 310 x 580	70	24
KL19-50	50	2	1.5	230/50	2850	150	5,3	8	116	770 x 430 x 660	71	32
KL20-24	24	2	1.5	230/50	2850	200	7,1	8	116	610 x 310 x 580	70	29
KL20-50	50	2	1.5	230/50	2850	200	7,1	8	116	770 x 430 x 660	71	37
KV25-20 1450*	20	2.5	1.8	230/50	1450	300	10,6	10	145	520 x 430 x 790	72	43
KV25-50 1450*	50	2.5	1.8	230/50	1450	300	10,6	10	145	1070 x 320 x 730	72	60
KLV30-20	20	3	2.2	230/50	2850	300	10,6	10	145	520 x 430 x 790	77	45
KLV30-50	50	3	2.2	230/50	2850	300	10,6	10	145	1070 x 320 x 730	77	62

*Available also in three phase version.

60 Hz option available.

Other voltages available on request.

Direct drive PUMPS

- Oil free pumps made up of a WOB-L piston, highly efficient ventilation system and induction electric motor;
- Wide range of lubricated pumps made up of a cast iron cylinder (except KLV 25 and KLV30 which have two cylinders), air displacement up to 300 L/min and 10 Bars pressure;
- With automatic thermal protection;




KD15



KL19



KL20

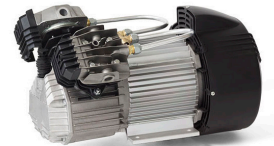

KLV25

MODEL	LUB	CYLINDER	STAGE	HP	KW	V/HZ	RPM	L/MIN	CFM	BAR	PSI	(L x D x H) mm	Kg
KD15	-	1	1	1.5	1.1	230/50	2850	170	6,0	8	116	340 x 185 x 315	8
KL19	•	1	1	2	1.5	230/50	2850	150	6,0	8	116	345 x 195 x 295	9
KL20	•	1	1	2	1.5	230/50	2850	200	6,0	8	116	335 x 180 x 290	12
KLV25	•	2	1	2.5	1.8	230/50	1450	300	6,0	10	145	425 x 330 x 300	25
KLV30	•	2	1	3	2.2	230/50	2850	300	6,0	10	145	425 x 330 x 300	25

Belt drive PROFESSIONAL

KAMARO professional compressors are the right choice for craftsmen and workshops. TOP QUALITY products made only with grade materials and components. The range consists of single stage (up to 4 Hp) and two stage (from 5,5 Hp to 10 Hp) machines, with air tanks ranging from 24 Litres to 500 Litres and 14 Bars max pressure.



K40-304T

K55-507FT

MODEL	LT	HP	KW	V/HZ	RPM	L/MIN	CFM	BAR	PSI	L x D x H (mm)	DB(A)	KG
K09-022M*	24	2	1.5	230/50	1250	250	8,8	10	145	740 x 320 x 660	72	37
K09-052M*	50	2	1.5	230/50	1250	250	8,8	10	145	1010 x 360 x 730	72	50
K09-102M*	100	2	1.5	230/50	1250	250	8,8	10	145	1100 x 400 x 830	72	62
K09-152M*	150	2	1.5	230/50	1250	250	8,8	10	145	1360 x 540 x 1060	72	86
K09-023M*	24	3	2.2	230/50	1500	300	10,6	10	145	740 x 320 x 660	72	39
K09-053M*	50	3	2.2	230/50	1500	300	10,6	10	145	1010 x 360 x 730	74	52
K09-103M*	100	3	2.2	230/50	1500	300	10,6	10	145	1100 x 400 x 830	74	64
K09-153M*	150	3	2.2	230/50	1500	300	10,6	10	145	1360 x 540 x 1060	74	88
K09-203M*	200	3	2.2	230/50	1500	300	10,6	10	145	1460 x 640 x 1140	74	102
K09-303M*	270	3	2.2	230/50	1500	300	10,6	10	145	1600 x 560 x 1150	74	122
K16-053M*	50	3	2.2	230/50	1500	350	12,4	10	145	1010 x 360 x 730	74	53
K16-103M*	100	3	2.2	230/50	1500	350	12,4	10	145	1100 x 400 x 830	74	65
K16-153M*	150	3	2.2	230/50	1500	350	12,4	10	145	1360 x 540 x 1060	74	89
K16-203M*	200	3	2.2	230/50	1500	350	12,4	10	145	1460 x 640 x 1140	74	103
K16-303M*	270	3	2.2	230/50	1500	350	12,4	10	145	1600 x 560 x 1150	74	123
K40-104T	100	4	3	400/50	1280	510	18,0	10	145	1100 x 400 x 870	74	71
K40-154T	150	4	3	400/50	1280	510	18,0	10	145	1360 x 540 x 1100	74	95
K40-204T	200	4	3	400/50	1280	510	18,0	10	145	1460 x 640 x 1180	74	109
K40-304T	270	4	3	400/50	1280	510	18,0	10	145	1600 x 560 x 1190	74	129
K45-105T	100	5.5	4	400/50	1450	500	17,7	10	145	1100 x 400 x 880	75	82
K45-155T	150	5.5	4	400/50	1450	500	17,7	10	145	1360 x 540 x 1110	75	106
K45-205T	200	5.5	4	400/50	1450	500	17,7	10	145	1460 x 690 x 1190	75	120
K45-305T	270	5.5	4	400/50	1450	500	17,7	10	145	1600 x 560 x 1200	75	140
K45-505FT	500	5.5	4	400/50	1450	500	17,7	10	145	1970 x 590 x 1280	75	220
K50-105T	100	5.5	4	400/50	1250	600	21,2	10	145	1100 x 400 x 890	75	86
K50-155T	150	5.5	4	400/50	1250	600	21,2	10	145	1360 x 460 x 1120	75	110
K50-205T	200	5.5	4	400/50	1250	600	21,2	10	145	1460 x 640 x 1200	75	124
K50-305T	270	5.5	4	400/50	1250	600	21,2	10	145	1600 x 560 x 1210	75	144
K50-505FT	500	5.5	4	400/50	1250	600	21,2	10	145	1970 x 590 x 1300	75	224
K50-207T	200	7.5	5.5	400/50	1450	685	24,2	10	145	1460 x 640 x 1200	78	136
K50-307T	270	7.5	5.5	400/50	1450	685	24,2	10	145	1600 x 560 x 1210	78	156
K50-507FT	500	7.5	5.5	400/50	1450	685	24,2	10	145	1970 x 590 x 1300	78	236
K55-207T	200	7.5	5.5	400/50	1300	845	29,8	10	145	1460 x 640 x 1260	76	150
K55-307T	270	7.5	5.5	400/50	1300	845	29,8	10	145	1600 x 560 x 1270	76	170
K55-507FT	500	7.5	5.5	400/50	1300	845	29,8	10	145	1970 x 590 x 1370	76	251
K55-507/15FT	500	7.5	5.5	400/50	1000	650	23,0	14	203	1970 x 590 x 1370	74	271
K60-310T	270	10	7.5	400/50	1088	1280	45,2	10	145	1600 x 560 x 1280	78	192
K60-510FT	500	10	7.5	400/50	1088	1280	45,2	10	145	1970 x 590 x 1380	78	273
K60-510/15FT	500	10	7.5	400/50	1000	850	30,0	14	203	2150 x 800 x 1610	76	293

*Available also in three phase version.

60 Hz option available. Other voltages available on request.

YA (star delta starter) option available starting from Hp 5.5.

500 Lt. compressors four wheels mounted option available on request.

Kamaro Essential Power.

Tandem series INDUSTRIAL

KAMARO industrial compressors are offered in the tandem version equipped with control panel for single or combined starting. These machines provide high air flow volume and are suitable for heavy duty applications, even for a continuous use. The range consists of 500 Litres receiver with power ratings from 4+4 Hp to 10+10 Hp and 900 Litres receiver powered with 7,5+7,5 Hp and 10+10 Hp.



TDK55-515FT

MODEL	LT	HP	KW	V/HZ	RPM	L/MIN	CFM	BAR	PSI	L x D x H (mm)	DB(A)	Kg
TDK45-508FT	500	4+4	3+3	400/50	1220	840	29,7	10	145	2050 x 590 x 1150	74	255
TDK50-511FT	500	5.5+.5.5	4+4	400/50	1200	1152	40,7	10	145	2050 x 590 x 1170	77	277
TDK55-515FT	500	7.5+7.5	5.5+5.5	400/50	1300	1690	59,7	10	145	2050 x 590 x 1240	78	305
TDK55-915FT	900	7.5+7.5	5.5+5.5	400/50	1300	1690	59,7	10	145	2150 x 800 x 1600	78	445
TDK60-520FT	500	10+10	7.5+7.5	400/50	1300	2215	78,2	10	145	2050 x 590 x 1250	78	369
TDK60-920FT	900	10+10	7.5+7.5	400/50	1300	2215	78,2	10	145	2150 x 800 x 1610	78	509

60 Hz option available.

Higher pressures up to 14 Bars available on request.

Belt drive SILENT

KAMARO silent air compressors are available from Hp 3 to Hp 10, with air tanks up to 500 Litres and 14 Bars max pressure. These machines feature a low level of impact. In fact they are assembled in a soundproof box with fireproof and sound absorbing material enabling the noise reduction to fall down as -10 dB(A) compared to traditional machines. The models with the dryer offer a complete package able to satisfy the most demanding requests at a very convenient price.



SLK50-4T

SLK40-203M

MODEL	LT	HP	KW	V/HZ	RPM	L/MIN	CFM	BAR	PSI	(L x D x H) mm	DB(A)	Kg
SLK40-3M	-	3	2.2	230/50	1250	500	17,7	10	145	864 x 591 x 745	68	115
SLK40-3T	-	3	2.2	400/50	1250	500	17,7	10	145	864 x 591 x 745	68	115
SLK50-4T	-	4	3	400/50	1200	565	20,0	10	145	864 x 591 x 745	68	125
SLK50-5.5T	-	5.5	4	400/50	1300	613	21,6	10	145	864 x 591 x 745	69	160
SLK55-7.5T	-	7.5	5.5	400/50	1000	850	30,0	10	145	864 x 591 x 745	66	170
SLK60-10T	-	10	7.5	400/50	1100	935	33,0	10	145	864 x 591 x 745	66	176
SLK40-203M	200	3	2.2	230/50	1250	500	17,7	10	145	1539 x 599 x 1167	68	175
SLK40-203T	200	3	2.2	400/50	1250	500	17,7	10	145	1539 x 599 x 1167	68	175
SLK50-304FT	270	4	3	400/50	1200	565	20,0	10	145	1612 x 599 x 1264	68	190
SLK50-305FT	270	5.5	4	400/50	1300	613	21,6	10	145	1612 x 599 x 1264	69	215
SLK50-505FT*	500	5.5	4	400/50	1300	613	21,6	10	145	2038 x 600 x 1357	69	279
SLK55-507FT*	500	7.5	5.5	400/50	1000	850	30,0	10	145	2038 x 600 x 1357	66	305
SLK60-510FT*	500	10	7.5	400/50	1100	935	33,0	10	145	2038 x 600 x 1357	66	311

60 Hz option available.

*Available also with dryer.

YA (star delta starter) option available starting from Hp 5.5.

Higher pressures up to 14 Bars available on request (only two stage models).

M = Single phase

T = Three phase

F = Stationary

L x D x H = Length x Depth x Height

Belt drive PETROL

- 4 stroke HONDA petrol engine;
- Self rewinding starter;
- HONDA tested application;
- Automatic release valve and vacuum setting which maintains a constant pressure in the tank;

- Two cylinders pump head full cast iron;
- Robust wheels for easy movement even in rough terrains;
- Self throttle kit under request;



PK09-055

MODEL	LT	HP	KW	ENGINE	RPM	L/MIN	CFM	BAR	PSI	(L x D x H) mm	DB(A)	Kg
PK09-055	50	5	3.6	GP 160	1250	250	8,8	10	145	1010 x 360 x 750	76	55
PK16-105	100	5	3.6	GP 160	1500	350	12,4	10	145	1100 x 400 x 850	76	65
PK16-155	150	5	3.6	GP 160	1500	350	12,4	10	145	1360 x 540 x 1060	76	98
PK16-205	200	5	3.6	GP 160	1500	350	12,4	10	145	1460 x 460 x 1140	76	110
PK40-205	200	5.5	4	GX 160	1280	510	18,0	10	145	1460 x 460 x 1140	76	150
PK40-305	270	5.5	4	GX 160	1280	510	18,0	10	145	1600 x 560 x 1230	76	170
PK45-305	270	5.5	4	GX 160	1440	490	17,3	10	145	1600 x 560 x 1230	76	174
PK50-309	270	9	6.5	GX 270	1270	598	21,1	10	145	1600 x 560 x 1230	76	200
PK50-509	500	9	6.5	GX 270	1270	598	21,1	10	145	1970 x 590 x 1300	76	280
PK55-509	500	9	6.5	GX 270	1035	673	23,8	10	145	1970 x 590 x 1300	76	284
PK60-513	500	13	9.4	GX 390	1270	1080	38,1	10	145	1970 x 590 x 1300	76	290

Higher pressures up to 14 Bars available on request (only two stage models).

Belt drive DIESEL

- YANMAR diesel engine;
- Self rewinding starter;
- Automatic release valve and vacuum setting which maintains a constant pressure in the tank;

- Two cylinders two stage pump head full cast iron;
- Robust wheels for easy movement even in rough terrains;
- Self throttle kit under request;



DK55-307

MODEL	LT	HP	KW	ENGINE	RPM	L/MIN	CFM	BAR	PSI	(L x D x H) mm	DB(A)	Kg
DK55-037	17+17	7.7	5.6	Hp 7.7	1250	650	23,0	10	145	1070 x 770 x 880	76	118
DK55-207	200	7.7	5.6	Hp 7.7	1500	650	23,0	10	145	1460 x 400 x 1040	76	140
DK55-307	270	7.7	5.6	Hp 7.7	1500	650	23,0	10	145	1600 x 500 x 1040	76	160
DK55-507	500	7.7	5.6	Hp 7.7	1500	650	23,0	10	145	1970 x 530 x 1110	76	240

Higher pressures up to 14 Bars available on request.

Belt drive PUMPS

- Cast iron cylinder;
- One stage pumps up to 510 L/min and 10 Bars working pressure;
- Two stage pumps up to 1088 L/min and 14 Bars max pressure;



MODEL	LUB	CYLINDER	STAGE	HP	KW	V/HZ	RPM	L/MIN	CFM	BAR	PSI	(L x D x H) mm	Kg
K09	•	2	1	2	1.5	-	1250	250	8,8	10	145	300 x 244 x 361	11
K09	•	2	1	3	2.2	-	1500	300	10,6	10	145	300 x 244 x 361	11
K16	•	2	1	3	2.2	-	1500	350	12,4	10	145	300 x 244 x 380	12
K40	•	2	1	4	3	-	1280	510	18,0	10	145	350 x 300 x 400	13
K45	•	2	2	5.5	4	-	1450	500	17,7	10	145	350 x 350 x 415	17
K50	•	2	2	5.5	4	-	1250	600	21,2	10	145	400 x 330 x 440	18
K50	•	2	2	7.5	5.5	-	1450	685	24,2	10	145	400 x 330 x 440	18
K55	•	2	2	7.5	5.5	-	1300	845	29,8	10	145	400 x 350 x 500	34
K55	•	2	2	7.5	5.5	-	1000	650	23,0	14	203	400 x 350 x 500	34
K60	•	2	2	10	7.5	-	1280	1088	38,4	10	145	530 x 400 x 600	39
K60	•	2	2	10	7.5	-	1000	850	30,0	14	203	530 x 400 x 600	39

KAMARO products are covered by 12 months warranty from the date of installation against manufacturing defects.

KAMARO is a young but experienced company that has made its strength thanks to the flexibility, market knowledge and quality without compromise. PERFORMANCE, EFFICIENCY AND RELIABILITY are typical of KAMARO products that are Made in Italy only with selected and grade components.

Kamaro
Essential power.

Kamaro
Via R. Atria, 3
40055 Castenaso (Bo)
Italy
Email export@kamaro.it
Website www.kamaro.it