




## Model: VHYD-04 Hydraulically Operated Diaphragm Type Dosing Pumps

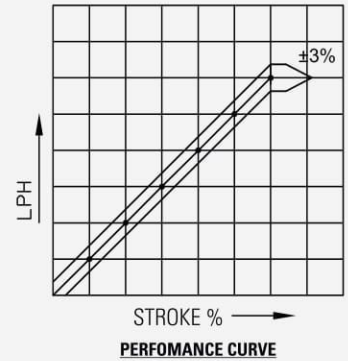

### SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1500 RPM				PL. Dia mm	Max. Pr. Kg/cm <sup>2</sup>	PUMP SPEED - 200 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1500 RPM			
Cap LPH	Suc. Del. mm NB/BSP	% OF Max. Pr.	Motor K.W.			Cap LPH	Suc. Del. mm NB/BSP	% OF Max. Pr.	Motor K.W.
102	15	100	3.7	20	200	204	15	100	7.5
147	25			24	200	293	25		
361	25			32	155	521	25		
407	25			40	100	815	25		
587	25			48	69	1173	40		
742	40	80	3.7	54	55	1485	40	80	5.5
979	40			62	41	1957	40		
1074	40			65	37	2151	40		
1320	40	50	2.2	72	30	2639	40	50	3.7
1753	40			82	23	3506	80X50		
2061	40	50	1.1	90	19	4122	80X50	30	2.2
2545	80X50			100	15	5089	80X50		
3080	80X50			110	12	6158	80X50		
3664	80X50			120	10	7329	80X50		

### MOC CHART

Sr. No.	Description	MOC	Sr. No.	Description	MOC
01	PLUNGER	EN 8	04	NRV Sealing Ring	PTFE
02	Liquid Head	S.S304, SS316, Hastalloy, alloy20,P.P.,PVC,PTFE	05	NRV Balls	SS, PTFE, Glass, Ceramic
03	Non Return	S.S304, SS316, Hastalloy, alloy20,P.P.,PVC,PTFE			

### FEATURE

- Multiple head pumps with common drive for mixing two or more liquid in a desired ratio.
- The ratio can be easily reset.
- The design & Performance of VHYD Pumps conforms to API675.

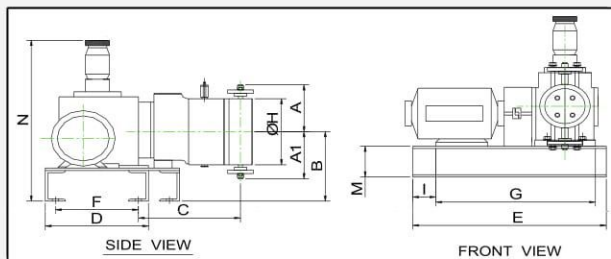

### DIMENSIONS IN mm

A	A1	B	C	D	E
285	285	275	445	495	810
F	G	H	I	M	N
460	670	290	100	75	640

**WEIGHT (App) : 340 Kg • PACKING SIZE : 36X42X31 Inches**